




09/ ALARM STATION (ref.1645C)

Communication accessory for the Oilspy Standard

The Alarm Station ensures acquisition and monitoring of the alarms from the OILSPY detectors.

Specifications

- o Acquisition and display of the alarms with timing
- o Monitoring of 8 Oilspy detectors (more in option)
- o Zoning in 8 areas possible
- o Data storage capacity: 256 recordings
- o Overwriting on oldest data
- o Display: TFT 5,7'' (14 cm) - Color - Touchscreen
- o Language: English / French
- o Power supply: 220 VAC or 24 VDC (<15W)
- o Dimensions: 230*194*330 mm
- o Material: Aluminium box
- o Protection IP 65
- o Ambient temperature: 0°C à +50°C
- o Humidity relative: <95% (without condensation)

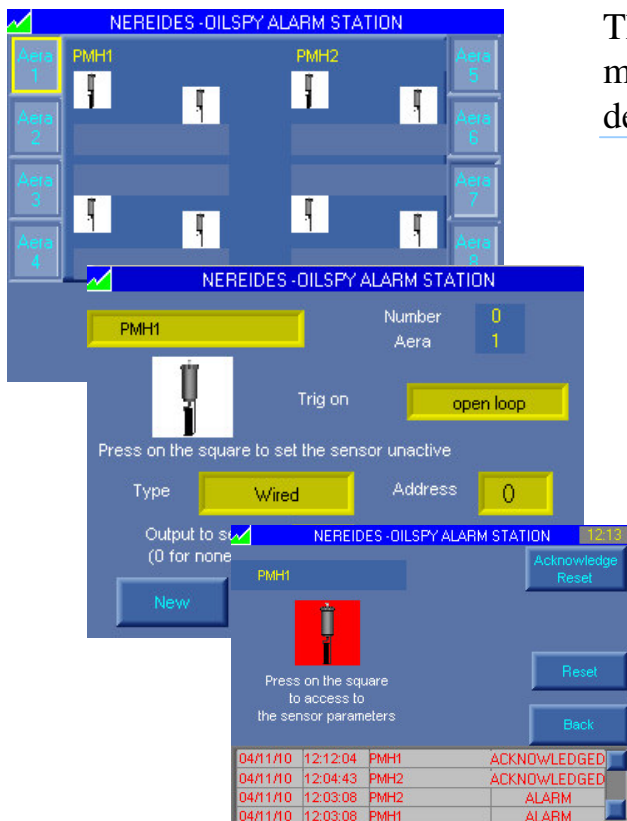

Communication

- o 8 digital inputs
- o 1 output for general alarm
 - Voltage: 250VAC/30VDC
 - Current: 2.5A on resistive load
- o 5 configurable outputs
 - Voltage: 250VAC/30VDC
 - Current: 2.5A on resistive load
- o Possible combination of several Oilspy on 1 output

Options

- o Serial port RS232 or RS485
- o Monitoring up to 64 detectors
- o Radio transmission
- o SMS Alarm via GSM (external modem)
- o External buzzer and / or light

Notices :

The alarm station is not ATEX. These data are only given as indications. They are not contractual.

NEREIDES
4 Avenue des Indes
91969 Courtaboeuf Cedex
France
www.nereides.fr



NEREIDES

Phone: +33 1 69078089
Fax : +33 1 69071914
Email : sales@nereides.fr